


POLYMAX HEAVY DUTY BULK RULLE Ø89 - 20

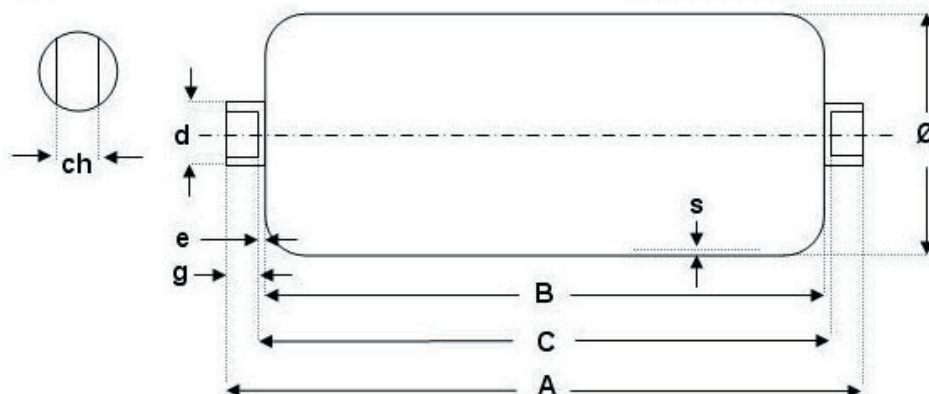

BÅND			RULLER										
Bredde mm			Dimensioner mm			Vægt Kg		Load kapacitet daN <small>(beregnet ud fra lejelevetid på 30.000 timer)</small>					
Opstilling			B	C	A	Roter. dele	Total	Båndhastighed i m/sek.					
								0,5	1,0	1,5	2,0	2,5	3,0
-	-	400	160	168	186	1,7	2,2	226	179	157	142	132	124
-	300	500	200	208	226	2,0	2,5	226	179	157	142	132	124
-	400	650	250	258	276	2,3	3,0	226	179	157	142	132	124
-	500	800	315	323	341	2,7	3,6	226	179	157	142	132	124
300	650	1000	380	388	406	3,2	4,1	226	179	157	142	132	124
-	800	1200	465	473	491	3,7	4,9	226	179	157	142	132	124
400	-	-	500	508	526	3,9	5,2	226	179	157	142	132	124
-	-	1400	530	538	556	4,1	5,5	226	179	157	142	132	124
500	1000	-	600	608	626	4,6	6,1	204	179	157	142	132	124
-	1200	-	700	708	726	5,2	7,0	173	173	157	142	132	124
650	-	-	750	758	776	5,5	7,4	161	161	157	142	132	124
-	1400	-	800	808	826	5,8	7,9	150	150	150	142	132	124
800	-	-	950	958	976	6,8	9,2	126	126	126	126	126	124
1000	-	-	1150	1158	1176	8,1	11,0	104	104	104	104	104	104
1200	-	-	1400	1408	1426	9,7	13,2	85	85	85	85	85	85
1400	-	-	1600	1608	1626	11,0	15,0	75	75	75	75	75	75

TEKNISKE DATA

Lejer: 6204
Aksler: 20x47x14 mm

DIMENSIONER

d = 20 mm ch = 14 mm s = 3 mm
e = 4 mm g = 9 mm